




### SPECIFICATION


The ULTRA VALVES Globe Style Silent Check valve can operate in any position. They are easy to install and dismantle. Silent check valve will begin to close as the forward flow velocity diminishes and be fully closed at zero velocity preventing flow reversal, thereby preventing water hammer and damaging shock normally associated with valve shut-off.


Suitable for waterworks, fire fighting, air conditioning, sea water etc.

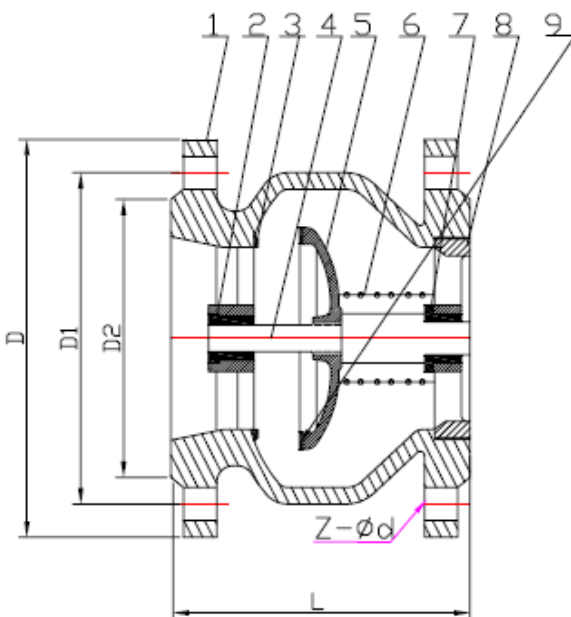

Dimension					
DN	L	D	D1	D2	Z-φd
50	118	165	125	100	
80	145	200	160	135	
100	165	220	180	155	
125	180	250	210	185	
150	205	285	240	210	
200	225	340	295	265	
250	250	405	355	320	
300	255	460	410	375	
350	280	520	470	435	
400	300	580	525	485	
06	Spring	304			
05	Disc	WCB		11	
04	Stem	2Cr13		10	
03	Seat	D507		09	Sealing face NBR
02	bearing	304		08	Locating seat WCB
01	body	WCB		07	bearing 304
N0	Name	Material		N0	Name Material

Comparison of Silent Check Valve's(SCV) Dynamic Characteristics

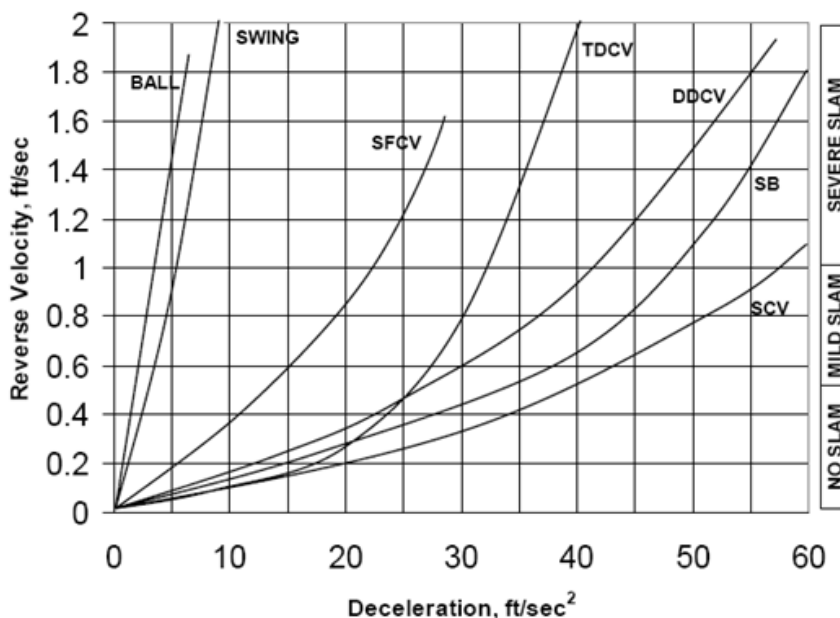

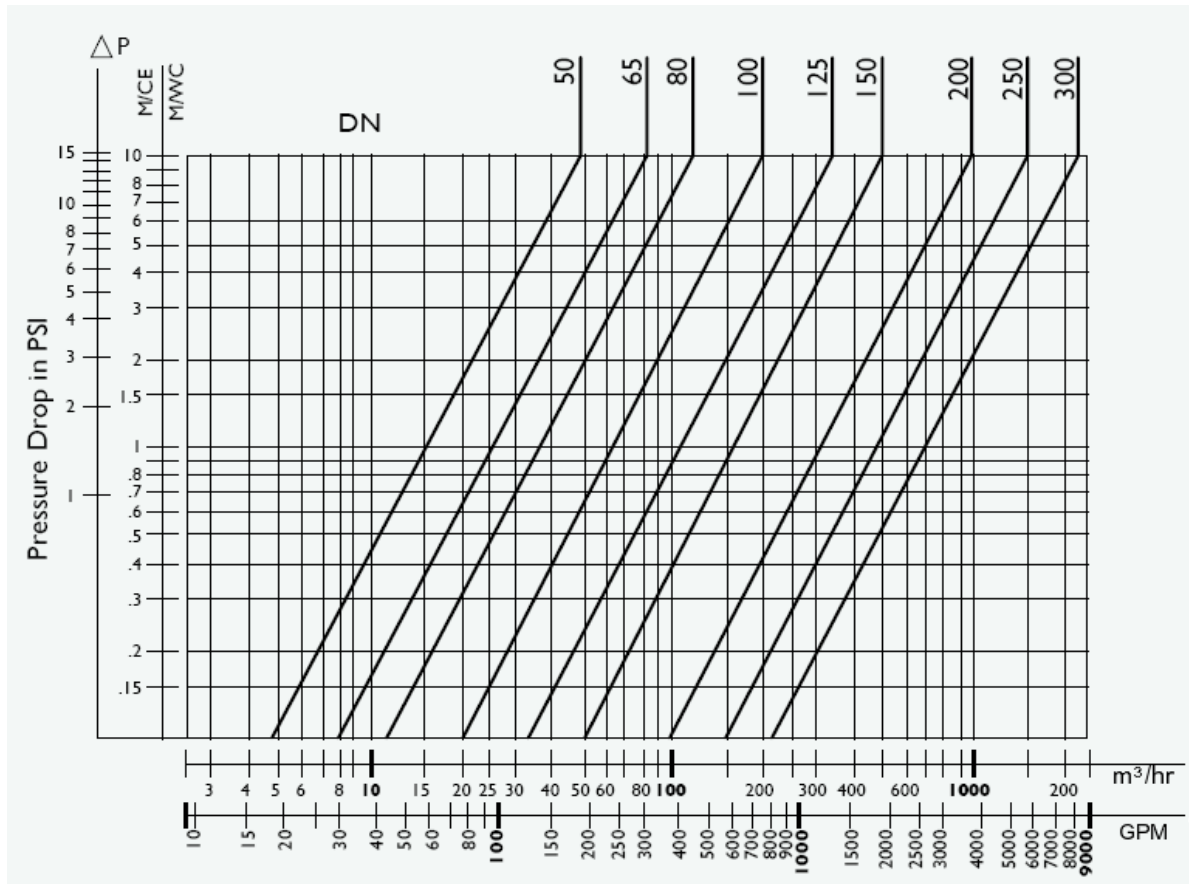

**Carl Hamm**  
Pipes | Pumps | Solutions

[www.carl-hamm.co.za](http://www.carl-hamm.co.za)